


FLEX SERIES—03N 2.6 METER

.35m x 2.6m
110 – 140W

CIGS Flexible Modules: High Power Density in a Flexible Form Factor

KEY FEATURES

- ▶ Record efficiency levels in a CIGS flexible form factor
- ▶ Low installed weight at less than 2.3 kg/m² (<0.5 lb/ft²)
- ▶ No penetrations, ballast or racking required
- ▶ Applicable for high wind load and high seismic hazard areas
- ▶ Bypass diodes reduce PV system shading losses
- ▶ Directly bonds to many approved surfaces

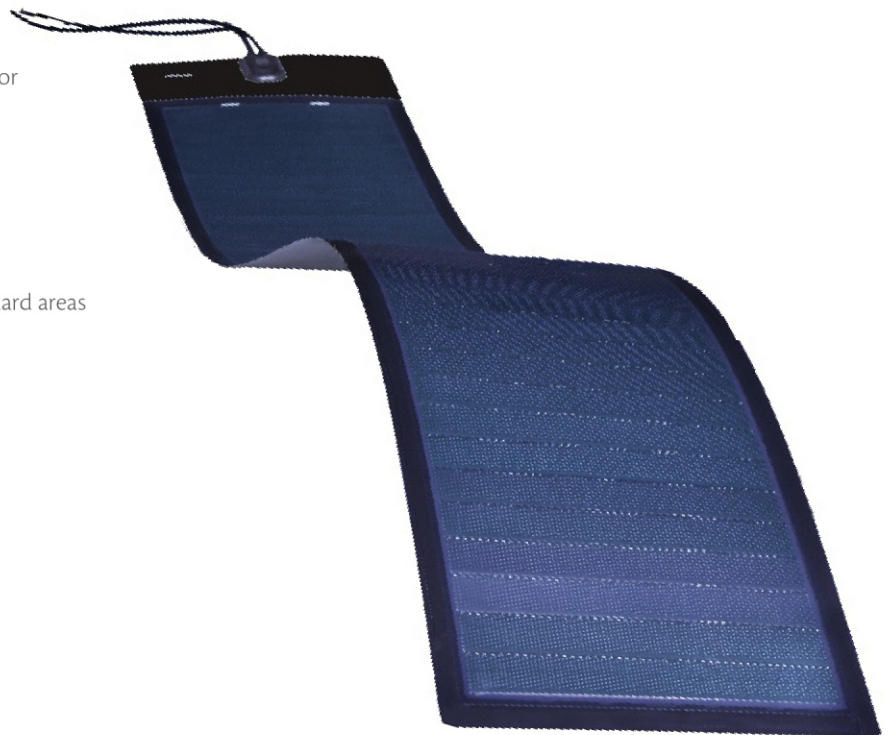

FLEX-03N 2.6 METER SERIES CIGS MODULE

ELECTRICAL PERFORMANCE AT STC¹

			FLEX-03 110N	FLEX-03 115N	FLEX-03 120N	FLEX-03 125N	FLEX-03 130N	FLEX-03 135N	FLEX-03 140N
Nominal Power	P_{MPP}	[W]	110	115	120	125	130	135	140
Aperture Efficiency	η	[%]	14.4%	15.0%	15.7%	16.4%	17.0%	17.7%	18.3%
Power Output Tolerance		[W]	+5/-0	+5/-0	+5/-0	+5/-0	+5/-0	+5/-0	+5/-0
Maximum Power Voltage	V_{MPP}	[V]	28.4	29.3	30.3	31.2	32.1	33.0	33.9
Maximum Power Current	I_{MPP}	[A]	3.89	3.93	3.97	4.01	4.06	4.10	4.14
Open Circuit Voltage	V_{OC}	[V]	36.3	37.0	37.8	38.6	39.4	40.1	40.9
Short Circuit Current	I_{SC}	[A]	4.66	4.62	4.58	4.53	4.49	4.45	4.41
Maximum Series Fuse Rating		[A]	10						
Maximum System Voltage	(IEC/UL)	[V]	1000/1000						


¹Standard Test Conditions (STC): 1000 W/m², 25°C cell temperature, AM 1.5 spectrum

THERMAL CHARACTERISTICS

NOCT	[°C]	48
Temperature Coefficient of P_{MPP}	[%/°C]	-0.38
Temperature Coefficient of V_{OC}	[%/°C]	-0.28
Temperature Coefficient of I_{SC}	[%/°C]	0.008

PHYSICAL AND MECHANICAL SPECIFICATIONS

Length	2583 mm (101.7 in, 8ft 5.7in)
Width	348 mm (13.7 in, 1ft 1.7in)
Thickness, Maximum at J-Box*, Module	17 mm (0.7 in), 2.5 mm (0.1 in)
Weight (Module without adhesive)	1.7 kg (3.7 lb)
Weight (Module with adhesive)	2.3 kg (5.0 lb)
Weight/Area (Module without adhesive)	1.9 kg/m ² (0.4 lb/ft ²)
Weight/Area (Module with adhesive)	2.6 kg/m ² (0.5 lb/ft ²)
Junction Box Type	IP68
Cable Connections	Helios H4 (S&F)
Cell Type	Copper Indium Gallium Diselenide (CIGS)
Warranty**	5 year workmanship; 10/25 year power output
Certifications	UL 1703, IEC 61646, IEC 61730, cUL 1703, IEC 62716, IEC 61701 (Salt Spray)
Packaging Info	10 modules per crate, 80 modules per pallet, 1600 modules per 20' ISO container, 3520 modules per 40' ISO container

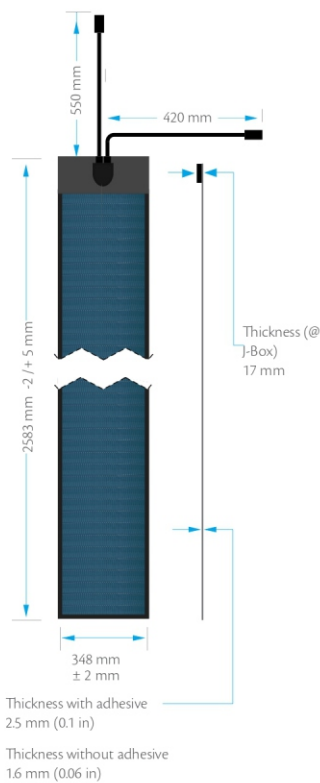

*2.5 mm (0.1 in) for the rest of the module with adhesive
 **1.6 mm (0.06 in) for the rest of module without adhesive
 **Please see full warranty for details



Anji Technologies Worldwide Energy Group (UK)
 110 Butterfield, London Luton Airport Area,
 LU2 8DL
 Tel: +44 (0) 1582 434393
 E-mail: admin@anjitek.co.uk
 Web: www.anjitek.co.uk

